



**Scaleton™**  
**Sets The Standard**  
**In Corrosion**  
**Resistance**

## Model 4042WB-26x52™ Secondary Spill Containment Scale

- Accurately displays the weight of the net remaining chemical that has NOT been dispensed into the water treatment system, while splashes and small spills are contained within the basin
- Splashes and small spills DO NOT appear as if they have been injected into the water treatment system
- Meets secondary spill containment requirements by the EPA, OSHA, and other local agencies
- Standard base size 26" x 52" (w/bladder) - other sizes available
- Gross capacity range 0-3000 lbs. (1361 kg) - other capacities available
- High accuracy of  $\pm 0.1\%$  to 0.5%
- Standard indicator: 3-1/2 digit LCD display with easy readability to 1 lb. (kg), 0.1lb (kg)



**Patented**



3-1/2 Digit Indicator  
(Standard)

4-1/2 Digit Indicator  
(Optional)

1020 5 Digit  
Controller (Optional)

1099 Chemical  
Process Controller (Optional)



### Standard Features

- Rugged steel construction protected by corrosion resistant finish, with polyethylene containment basin
- Four load cell design means the load can be placed anywhere on the containment platform and does not need to be leveled
- Electronic indicator housed in NEMA 4X, UL approved enclosure to provide protection from acids
- Load cells are mounted outside of spill containment basin to eliminate damage due to chemical spills.
- Self-locking tare adjustment knob
- 4-20 mA output – scale or loop powered
- 20 ft. of 4 conductor wire cable

### Options

- 240 VAC power (4-1/2 digit display)
- 4-1/2 digit display with active and passive 4-20 mA, 0-20 mA, and -8 to +12 mA, and two adjustable low level contacts
- Model 1020™ 5 digit controller with loop powered 4-20 mA, up to four adjustable set points and one or two channels
- Model 1099™ Chemical Process Controller
- Remote mounting of indicator box up to 200 feet (61 meters) away
- Junction box – Additional length of wire cable


### Chemicals

Scale is designed to accurately measure weight of alum, ammonia, caustic, fluoride, phosphate, polymers, sodium aluminate, sodium bisulfate, sodium hydroxide, sodium hypochlorite and other liquids or powders

**Scaleton Industries Ltd.**  
Bedminster Industrial Park  
53 Apple Tree Lane • P.O. Box 365  
Plumsteadville, PA 18949 • USA


Tel: (+1) 215-766-2670 (International)  
Tel: (+1) 800-257-5911 (USA & Canada)  
Fax: (+1) 215-766-2672

Email: [info@scaletonscales.com](mailto:info@scaletonscales.com)  
Website: [www.scaletonscales.com](http://www.scaletonscales.com)

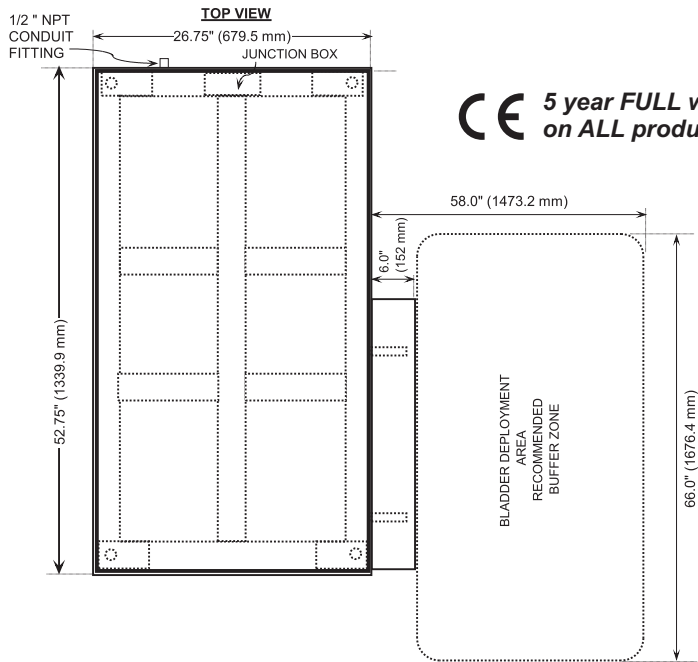

**CE** 5 year FULL warranty on ALL products!

## Model 4042WB-26x52™ Secondary Spill Containment Scale w/Bladder General Specifications

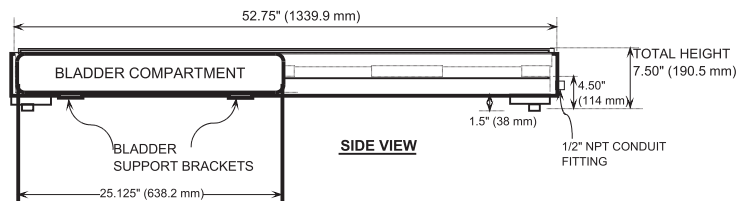

| Indicator:   | 3-1/2 Digit   | 4-1/2 Digit                                      | 1020™  | 1099™ C.P.C.  |
|--|---|--|--|---|
| <b>Platform Size &amp; (Containment Capacities):</b> | 26"x52" (30 gal. in basin & 55 gal. in deployed bladder) – other sizes available              |  |  |   |
| <b>Platform Height:</b>                              | 3-1/2 inch high (88.0mm)  |  |  |   |
| <b>Gross Capacity:</b>                               | Up to 3000 lbs. (1361 kg) – other capacities available (150% overload protection is provided) |  |  |   |
| <b>Accuracy:</b>                                     | 0.5% of full capacity   |  | .01%-0.25% full capacity   |   |
| <b>Resolution:</b>                                   | 0.1 up to 199.9, or 1.0 over 200 lbs. (kg)  |  | 0.1 up to 999.9, or 1.0 over 1000 lbs. (kg)  |   |
| <b>4-20 mA:</b>                                      | Standard – scale or loop powered  |  | Standard on Channel 1,<br>Optional on Channel 2<br>– loop powered  | Standard on Channel 1 – loop powered<br>(available for Channels 2 thru 4) |
| <b>Level Indication/<br/>Relay Contacts:</b>         | Optional  | (2) Standard                                     | Optional – Up to 4 (as high or low)<br>on one channel or more than<br>one per channel for a total of 4 set<br>points with relay contract |   |
| <b>Power:</b>  | 85 VAC to 265 VAC   | 120VAC, 50/60 Hz, 0.3A<br>240VAC, 50/60Hz, 0.15A | 85VAC to 265VAC  |   |
| <b>Enclosure:</b>                                    | NEMA 4X, UL Approved Enclosure  |  |  |   |
| <b>Shipping Weight:</b>                              | 100 lbs   |  |  |   |

### Typical Specifications

The Integral Splash, Spill & Containment Scale must have rugged steel frame and shall be dry powder polyester plastic coated. The integral containment deck shall be solid polyethylene. All hardware must be stainless steel. Scale frame height shall not exceed 1.5". Total height depends on containment capacity. Load cells must be sealed in gasketed PVC enclosure. All 4 load cells shall be located outside the chemical containment basin to eliminate damage due to chemical spills. Indicator must be electronic with digital readout and housed in a NEMA 4X, UL approved fiberglass enclosure. There shall be a 4-20 mA output signal.

Scale shall be a Model 4042WB-26x52™ (with bladder) as manufactured by Scaletron Industries Ltd., Plumsteadville, PA.

#### STANDARD INDICATOR:

3-1/2 Digit LCD Indicator: Indicator must be electronic with digital display with characters 0.5 inches high, with 0.1 lb. or 0.1 kg resolution and housed in a NEMA 4X, UL approved enclosure. Indicator is required to have 4-20 mA output selectable as scale powered or loop powered, standard. Indicator must have a knob to set tare weight. Accuracy is 0.5% of full scale, or better.

#### OPTIONAL INDICATORS:

4-1/2 Digit LED indicator: Indicator must be electronic with digital display with characters 0.56 inches high and housed in a NEMA 4X, UL approved enclosure. An output of 4-20 mA, 0-20 mA, or -8 to + 12 mA, selectable as scale or loop powered to provide versatility to interface with related equipment, must be standard equipment. Indicator comes with two low level relay contacts, standard. A knob to set tare weights is required. Indicator must be capable of 0.1 lb. or 0.1 kg up to 1000.0 lbs. or kg. Accuracy is 0.5% of full scale, or better.

Model 1020™ 5 Digit Controller: Controller must be electronic with a two line, backlit alphanumeric digital display and housed in a NEMA 4X, UL approved enclosure. Available as single or dual channel and capable of displaying two channels simultaneously. A loop powered programmable output of 4-20 mA and four set points per channel must be standard equipment. Indicator must be capable of 0.1 lb. or 0.1 kg up to 3000 lbs. or 1361 kg. Accuracy is 0.25% of full scale, or better.

Model 1099™ Chemical Process Controller see separate specification.