




SCALETRON™ SETS THE STANDARD
IN CORROSION RESISTANCE™

Model 4010™ Digital Tank Scale

- Standard base sizes: 24"x 24", 30"x 30", 36"x 36" & 48"x 48" - custom capacities available
- Net capacity: Up to 5,000 lbs. (2268 kg) – custom capacities available
- High accuracy of $\pm 0.25\%$ of capacity
- Single or multi-channel controllers with easy readability to 0.1 lb. (kg)
- Readout in pounds, kilograms, gallons or liters

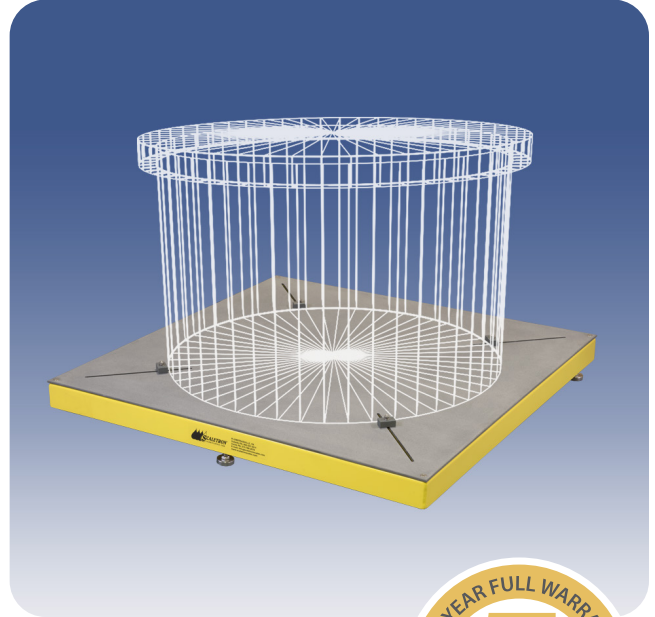

AccuPro 1000-1
Controller with
Keypad



AccuPro 1000-2
Controller with
Keypad



AccuPro 6000-TS
Controller with
Touch Screen



AccuPro 7000-TS
Controller with
Touch Screen

Accurately Weigh a Permanently Mounted a Tank or Drum in Pump In/Out Applications

Model 4010 is designed for weighing tanks or drums up to 48" in diameter. Featuring an economical single load cell design, the scale base is ideal for high capacity, centered load applications. MADE IN USA.

Standard Features

- Rugged steel construction protected by a corrosion resistant, zinc oxide primed and dry powder epoxy coated finish, with solid 1/4" PVC decking for use in harsh environments
- Low profile platform (3.75" or 4.75") design increases safety and ease of tank handling
- Designed for centered loads – includes adjustable tank centering blocks in base
- NTEP stainless steel shear beam, temperature compensated load cell
- All hardware is stainless steel to prevent corrosion
- Electronic indicator housed in NEMA 4X, UL approved enclosure to provide protection from acids
- 20 ft. of 4 conductor wire cable

Available Controllers

- AccuPro 1000 Digital Controller with 1 or 2 channels, 4 button keypad and optional 4-20 mA output signal – scale or loop powered
- AccuPro 6000 Digital Controller with 1 or 2 channels, touch screen and 4-20 mA output signal – scale powered
- AccuPro 7000 Digital Controller with up to 4 channels, touch screen and 4-20 mA output signal – scale powered


Options

- High and low level set points
- 0-5V or 0-10V output signal
- Remote mounting of indicator box up to 200 feet away
- Seismic hold down brackets
- Stainless steel, ball-bearing bolt down feet (4)

Chemicals Weighed

- Alum, ammonia, caustic, fluoride, phosphate, polymers, sodium aluminate, sodium bisulfate, sodium hydroxide, sodium hypochlorite and other liquids or powders

Model 4010™ Digital Tank Scale Sizes & Specifications

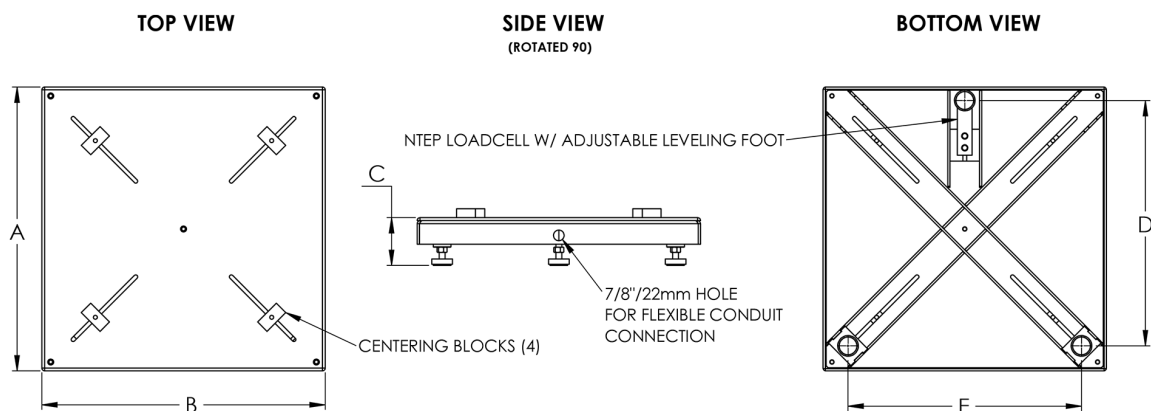

Scale Base

PART NUMBER	4010-24	4010-30	4010-36	4010-48
Platform Length (A)	24" (610 mm)	30" (762 mm)	36" (914 mm)	48" (1219 mm)
Platform Width (B)	24" (610 mm)	30" (762 mm)	36" (914 mm)	48" (1219 mm)
Platform Height (C)	3.75" (95 mm) - add 1/2" for bolt down feet	3.75" (95 mm) - add 1/2" for bolt down feet	3.75" (95 mm) - add 1/2" for bolt down feet	4.75" (121 mm) - add 1/2" for bolt down feet
D	19.78" (502 mm)	26.37" (670 mm)	31.82" (808 mm)	44.62" (1133 mm)
E	20.75" (527 mm)	27.05" (687 mm)	36.42" (925 mm)	45.17" (1147 mm)
Net Capacity	Up to 1000 lbs. (454 kg) (150% overload protection)	Up to 1500 lbs. (680 kg) (150% overload protection)	Up to 2500 lbs. (1134 kg) (150% overload protection)	Up to 5000 lbs. (2268 kg) (150% overload protection)
Weight	130 lbs.	150 lbs.	160 lbs.	240 lbs.

Digital Controllers

PART NUMBER	ACCUPRO 1000	ACCUPRO 6000-TS or 7000-TS
Interface	4 Button keypad	Touch screen
Accuracy	±0.1% to ±0.25% of full scale capacity	±0.1% to ±0.25% of full scale capacity
Display	1 Line x 6 character alphanumeric backlit LCD with 6 digits for weight	4.3" Graphic color LCD touch screen display with adjustable brightness
Display Items	Net weight and tare adjustment	Net and gross weight, % and bar graphs; mA out, tare adj., set points, 7000: data log, feed rate, daily usage, amount used, days till empty; batch net wt, batch and total amount, time
Channels	1 or 2 - One scale base per channel	Up to 4 - One scale base per channel
Output Signal	4-20mA Optional – scale or loop powered	4-20mA Optional - scale powered
Set Points		2 or 4 Per channel (high or low) - max. 8
Remote Option	Up to 200 feet from base frame	Up to 200 feet from base frame
Audible Alarm		Optional 78 dB internal piezo buzzer, external buzzer support
Communication Option		Modbus TCP or RTU
Power	90/240 VAC, 50/60Hz, 0.10/0.05A	100/277 VAC, 50/60 Hz, 0.10/0.05A
Weight	NEMA 4X, UL approved enclosure	NEMA 4X, UL approved enclosure
Enclosure	7lbs.	7lbs.