



SCALETRON™ SETS THE STANDARD
IN CORROSION RESISTANCE™

Model 4042ECO-WB-26x52™ Economical Spill Containment Dual Drum Scale with Bladder

- Splashes and spills of hazardous chemicals are captured within the containment basin
- Standard base size: 26"x52" (plus bladder) – other sizes available
- Net capacity: Up to 1,000 lbs. (454 kg) per base – other capacities available
- Containment capacity: 88 gal.
- High accuracy of $\pm 0.25\%$
- Single or multi-channel controllers with easy readability to 0.1 lb. (kg)
- Readout in pounds, kilograms, gallons or liters



AccuPro 1000-1
Controller with
Keypad



AccuPro 1000-2
Controller with
Keypad



AccuPro 6000-TS
Controller with
Touch Screen



AccuPro 7000-TS
Controller with
Touch Screen

Economical Dual Drum Scale with Expandable Bladder Meets EPA & OSHA Requirements for Spill Containment

Model 4042ECO-WB-26x52 is designed for weighing two tanks or drums up to 26" in diameter simultaneously. Featuring an economical two load cell design, the scale base is ideal for centered load, pump in/out applications. MADE IN USA.

Standard Features

- Rugged steel construction protected by corrosion resistant, zinc oxide primed and dry powder epoxy coated finish, with polyethylene containment basin for use in harsh environments
- Designed for centered loads – includes heavy-duty steel backstops to help position the drums
- Expandable bladder automatically deploys in the event of a major spill
- Hinged base can be lifted for easy access and cleaning of the basin
- Two (2) NTEP stainless steel shear beam, temperature compensated load cells with stainless steel leveling foot
- Load cell is mounted outside of spill containment basin to eliminate damage due to chemical spills
- All hardware is stainless steel to prevent corrosion
- Electronic indicator housed in NEMA 4X, UL approved enclosure to provide protection from acids
- 20 ft. of 4 conductor wire cable

Available Controllers

- AccuPro 1000 Digital Controller with 1 or 2 channels, 4 button keypad and optional 4-20 mA output signal – scale or loop powered
- AccuPro 6000 Digital Controller with 1 or 2 channels, touch screen and 4-20 mA output signal – scale powered
- AccuPro 7000 Digital Controller with up to 4 channels, touch screen and 4-20 mA output signal – scale powered


Options

- High and low level set points
- 0-5V or 0-10V output signal
- Remote mounting of indicator box up to 200 feet away

Chemicals Weighed

- Alum, ammonia, caustic, fluoride, phosphate, polymers, sodium aluminate, sodium bisulfate, sodium hydroxide, sodium hypochlorite and other liquids or powders

Model 4042ECO-WB-26x52™ Economical Spill Containment Dual Drum Scale with Bladder Specifications

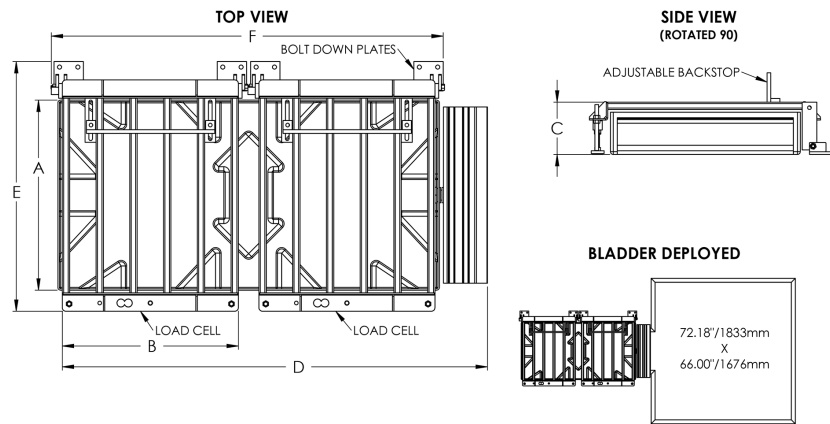

Scale Base

PART NUMBER	4042ECO-WB-26X52
Platform Length (A)	25.88" (657 mm)
Platform Width (B)	24.0 (610 mm)
Platform Height (C)	7.0" (178 mm)
D	57.95" (1472 mm)
E	34.0" (834 mm)
F	53.4" (1357 mm)
Net Capacity	Up to 1000 lbs. (454 kg) for each base (150% overload protection is provided)
Containment Capacity	22 gal. – 88 gal. total with deployed bladder
Weight	215 lbs.

Digital Controllers

PART NUMBER	ACCUPRO 1000	ACCUPRO 6000-TS or 7000-TS
Interface	4 Button keypad	Touch screen
Accuracy	±0.1% to ±0.25% of full scale capacity	±0.1% to ±0.25% of full scale capacity
Display	1 Line x 6 character alphanumeric backlit LCD with 6 digits for weight	4.3" Graphic color LCD touch screen display with adjustable brightness
Display Items	Net weight and tare adjustment	Net and gross weight, % and bar graphs; mA out, tare adj., set points, 7000: data log, feed rate, daily usage, amount used, days till empty; batch net wt, batch and total amount, time
Channels	1 or 2 - One scale base per channel	Up to 4 - One scale base per channel
Output Signal	4-20mA Optional – scale or loop powered	4-20mA Optional - scale powered
Set Points		2 or 4 Per channel (high or low) - max. 8
Remote Option	Up to 200 feet from base frame	Up to 200 feet from base frame
Audible Alarm		Optional 78 dB internal piezo buzzer, external buzzer support
Communication Option		Modbus TCP or RTU
Power	90/240 VAC, 50/60Hz, 0.10/0.05A	100/277 VAC, 50/60 Hz, 0.10/0.05A
Weight	NEMA 4X, UL approved enclosure	NEMA 4X, UL approved enclosure
Enclosure	7lbs.	7lbs.